

CeLight LED Sheet Flexible Type

Features:

- *Flexible LED sheet
- *Field cuttable
- *Perfect for back light / light box application
- *IP 65 rated

Specification:

Model: CL300SWxx-24V-Cx / CL450SWxx-24V-Cx

*"SWxx" - color temperature *"Cx" - quantity of power-in cable

Size: 300mm x 300mm (11.81" x 11.81")
450mm x 450mm (17.72" x 17.72")

LED: Surface mount type LED
CL300-25mm (0.98")
CL450-37.5mm (1.48") Spacing

LED Quantity: 144pcs (12 x 12 LEDs)

Power Consumption: CL300 - 14.4W
CL450 - 23.0W

Output Lumen: CL300 1350lm per sheet
CL450 2130lm per sheet

Input Voltage: 24 VDC

LED Types: SMT LED

CRI: >80

Beam Angle: 120°

Available Color (K): 2700, 3000, 3500, 4000

Dimmable: Yes

Material: Laminated fiber glass (Thickness 0.3mm)

Suggested Room Temperature: -10°~80°

Suggested Room Humidity: 20~80%


Application: Interior use only

- *Minimum folding radius 90mm
- *Standard power-in cable at C1, C2 location



IES File: Available upon request

Diagram: Available upon request

Dimension:

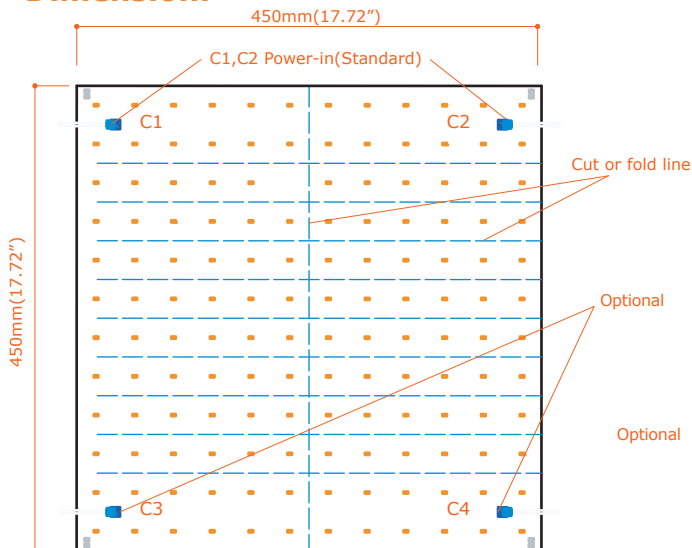


Standard Configuration CL450

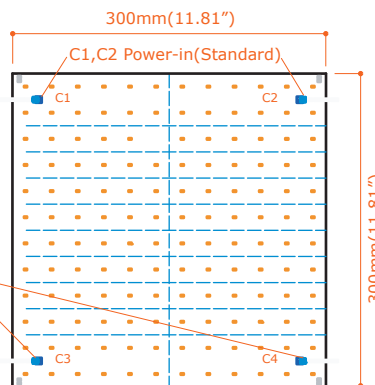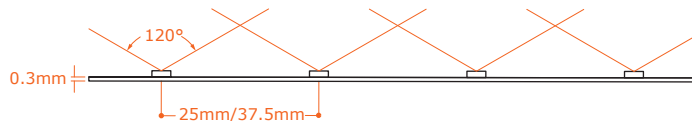


Standard Configuration CL300

*Edge cover Optional

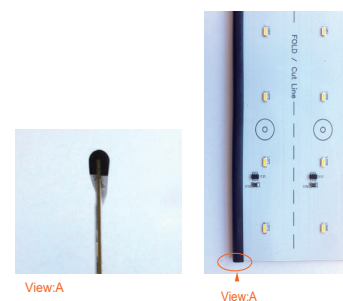


©Copyright 2018 SGF Associates, Inc.

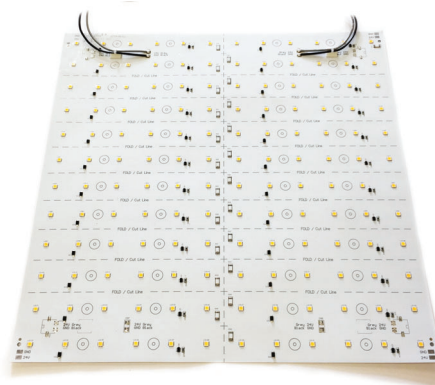

CL300



CL450

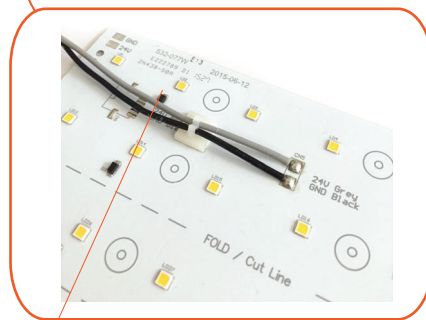

Jumper Wire