

CeLight Tape Series 757

Features:

- *Ultra thin profile
- *Flexible strip suitable for both flat or curved surface
- *Field cuttable
- *Metal backing available for heat management

Specification:

Model: CLT-006-757-25 / CLT-006-757-12.5

Size: 6.0mm(W)(0.24") x 0.9mm(H)(0.07")
x Max length 900mm(L)(35.43")

LED Stripe: 75mmL(2.95") / 37.5mmL(1.48") Increments
Single row
25.0mm(0.98") / 12.5mm(0.49") Spacing

LED Quantity: 3 / 6 per 75mmL(2.95")

Power Consumption: 4.5W per 300mmL(11.81")

Output Lumen: CLT-006-757-25/ 410lm per 300mmL
CLT-006-757-12.5/ 420lm per 300mmL

Input Voltage: 12VDC

LED Types: SMT LED

CRI: >90

Beam Angle: 120°

Lamp Life: 50,000 Average life hours

Available Color (K): 2700, 3000, 3500, 4000, 4500

Dimmable: Yes

Cooling: Heat sink (Required)

Material: Laminated Fiberglass (Thickness 0.3mmL)

Suggested Room Temperature: 0°~40°C


Suggested Room Humidity: 20~80%

Application: Interior use only

IES File: Available upon request

Diagram: Available upon request

Dimension:

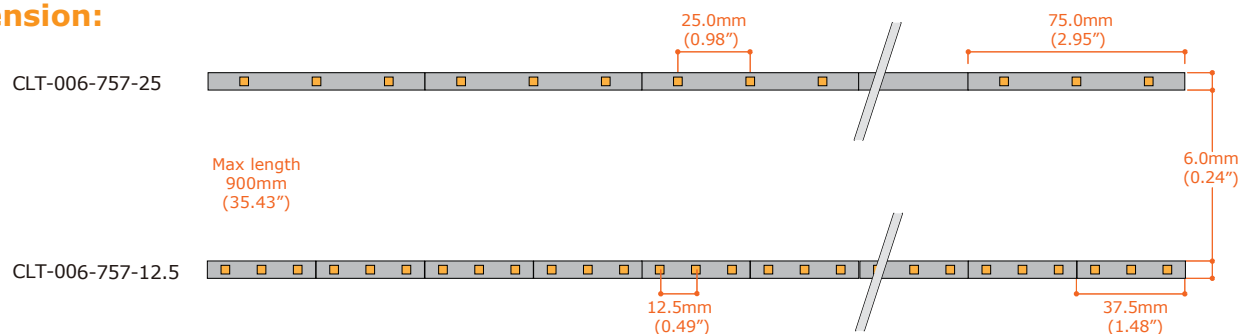

*CLT-006-757-25 shown in the picture