

CeLight LED Sheet Flat type (Warm / Cool 2-circuit)

Features:

- * Warm and Cool dimmable
- * Field cuttable
- * Perfect for back light - light box application
- * IP 65 rated

Specification:

**SWxx"- color temperature *Cx"- quantity of power-in cables

Model: CLH225-SWxxxx-Cx 21.6W-2T

CLH225-SWxxxx-Cx 36W-2T

Size: 450mm x 225mm (17.72" x 8.86")

LED: 37.5mm(1.48") Spacing

LED Quantity: 72pcs per sheet

Power Consumption: 21.6W, 36W

Output Lumen: 1720lm per sheet (21.6W)
2740lm per sheet (36W)

Input Voltage: 24VDC

LED Types: SMT LED

CRI: >80

Beam Angle: 120°

Available Color (K): 2700, 3000, 4000, 5000

Dimmable: Yes

Material: Laminated fiber glass (Thickness 1.0mm)

Suggested Room Temperature: -10°C ~ 80°C


Suggested Room Humidity: 20~80%

Application:

- * Ingress Protection Rating(IP) 65
- * Standard power-in cable at C1, C2 location
- * Heatsink is required (Aluminum is recommended)

IES File: Available upon request

Diagram: Available upon request

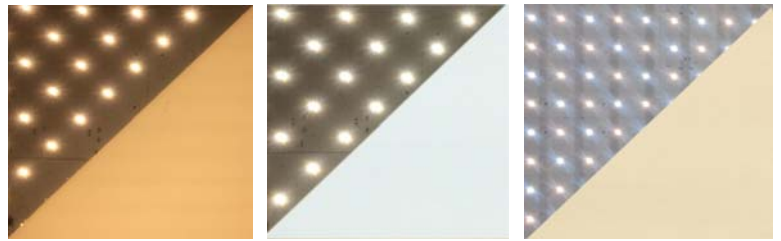

*Warm & Cool color with Opaque Diffuser



Warm Cool Mix Color



CLH225

WIRE CONNECTOR

Dimension:

