

MSS (Motorized Scintillation System)

Features:

- *The vertical motion of cool and warm linear light integrated to a motorized system scintillates objects
- *Perfect for vitrine showcase for watch/jewelry
- *Standard length 500mm, Max length 635mm (Motor system not included)

Specifications:

Model: MSS-500-12/HSCT-3040-xxx-12 (xxx:length)
Size: 45mm(W)(1.77") x 60mm(H)(2.36") x Standard length 630mm(L)(24.80")

(Motorized System)

Size: 45mmH x 60mmD x 130mmL
Power Consumption: 2.4W
Finish: Black


(LED Strip)

Size: 300mm(standard), Max length 450mm
LED Strip: 150mmL(6") Increments/ Single row/ 50mmL Spacing
LED Quantity: 3 per 150mmL(6")
Power Consumption: 7.2W per 300mmL(11.8")
Output Lumen: 430lm per 300mmL
Input Voltage: 12 VDC
LED Types: SMT LED
CRI: >90
Lamp Life: Average life hours 50,000 hours
Available Color (K): 3000K(Warm) and 4000K(Cool)
Beam Angle: 120°

Dimmable: Yes
Cooling: Heat sink
Finish: Black
Suggested Room Temperature: 0°~40°C
Suggested Room Humidity: 20~80%
Application: Interior use only
Mounting Method: Screw

Diagram: Available upon request

*Dimming System Controller
 MSS Dimmer recommended

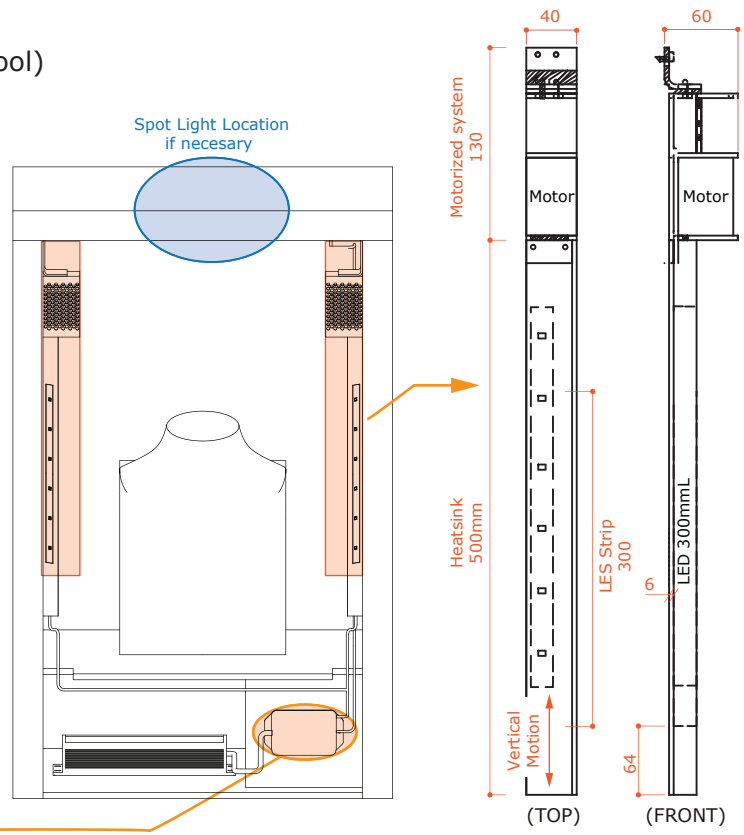

(Installation example)

(Standard)

*Front view