

CMS-xxW COB Mini Spot Fixture

Features:

- *Single, powerful COB (chip on board) LED design package
- *Sleek and compact MR11 size body
- *Available in 10W, 5W and 3.5W
- *Very quiet fan (10W, 5W)
- *MO track compatible
- *Suitable for floodlights and all kinds of spotlight application



CMS-10W-23°
Reference

Specification:

Model: CMS-xxW-yy (xxW= Wattage) (yy=Lens)

Size: 48.0mm(D)(1.89") x (10W/5W) Fan - 66.0mm(L)(2.60")
(3.5W) No Fan - 53.5mm(L)(2.10")

LED Quantity: 1 per Fixture

Power Consumption: (10W)- 10.6W per Fixture
(5W)- 6.7W per Fixture
(3.5W)- 4.32W per Fixture

Output Lumen: (10W)- 1270lm per Fixture
(5W)- 640lm per Fixture
(3.5W)- 480lm per Fixture

Input Voltage: 24VDC

LED Types: COB LED

CRI: >90

Lamp Life: 50,000 Average life hours

Available Color (K): 3000, 3500, 4000 (Custom color available)

Lens: Cone Lens (CL): 29°, 50° (fwhm)
Reflectors (RF): 21°, 33°, 45°, 57°

Dimmable: Yes

Cooling: Fan, Heat sink

Suggested Room Temperature: 0°~40°C


Suggested Room Humidity: 20~80%

Application: Interior use only

Mounting Method: Magnet, MO Track

Accessories: Snoot, Louver and Diffuser(253/132) are available

Listed:

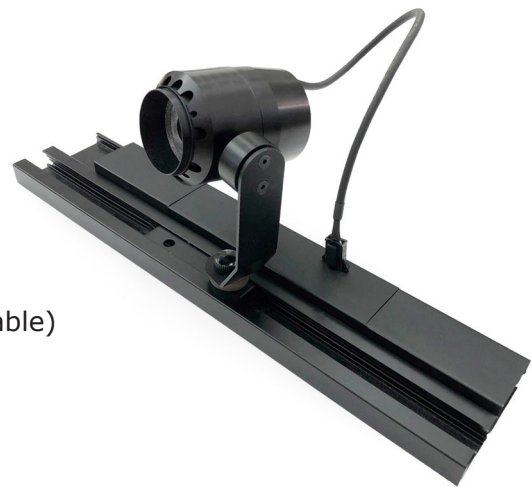

MO Track attachment

Dimension:

Front View

Back View

Side View

